



# AlphaTheta OMNIS-DUO Quickstart Guide

# Setup

## Serato software

The AlphaTheta OMNIS-DUO is a “Serato DJ Lite hardware unlocked” device, meaning it works with Serato DJ Lite out of the box.

It is also a “paid upgrade to Serato DJ Pro device”, meaning it requires the purchase & activation of a Serato DJ Pro license, in order to be used with Serato DJ Pro.

**You can also try Serato DJ Pro, before making a purchase:**

[Click here to learn about buying or activating Serato DJ Pro](#)

or

[Click here to learn about trying Serato DJ Pro](#)

**Please ensure you have the latest version of Serato DJ Lite installed:**

[Click here to download Serato DJ Lite](#)

## Drivers

The AlphaTheta OMNIS-DUO is class compliant on macOS, but requires manufacturer specific drivers when used with Windows operating systems.

Regardless of your operating system, download and install the latest version of Serato DJ Lite, then connect your OMNIS-DUO with a USB cable to your computer, and launch Serato DJ Lite.

If using Windows, when prompted, click the **Install Driver** pop-up.


Alternatively, you may download the latest driver directly from [Pioneer DJ's website](#).

## Connection


Connect your OMNIS-DUO with a USB cable to your computer & launch Serato DJ Lite, and follow the prompts below, on the OMNIS-DUO touch-screen display:

1. Touch **[SOURCE]**
2. Touch **[SOFTWARE CONTROL]**
3. Touch **[LOAD 1]** to connect deck 1
4. Touch **[LOAD 2]** to connect deck 2

# Overview

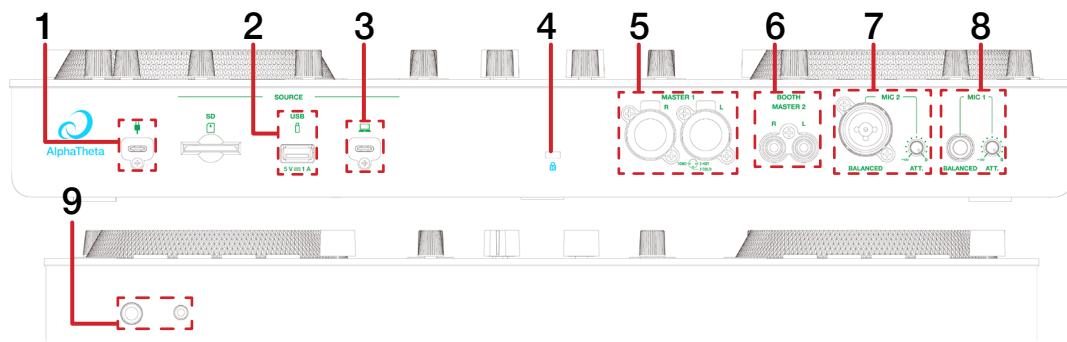

#	OMNIS-DUO CONTROL	FUNCTION
1	USB-C POWER INPUT	Connect the included USB-C power adapter to a power source
2	USB-A SOURCE	Connect USB storage device for standalone usage or firmware update
3	USB-C PC	Connect USB cable to PC
4	KENSINGTON LOCK	Secure device
5	MASTER 1	Main audio output via XLR
6	BOOTH MASTER 2	Connect Booth output via balanced TRS
7	MIC 2	Connect microphone input via balanced XLR or TRS, and control microphone input attenuation
8	MIC 1	Connect microphone input via balanced TRS, and control microphone input attenuation
9	PHONES	Connect headphones via 3.5mm or 6.5mm jack

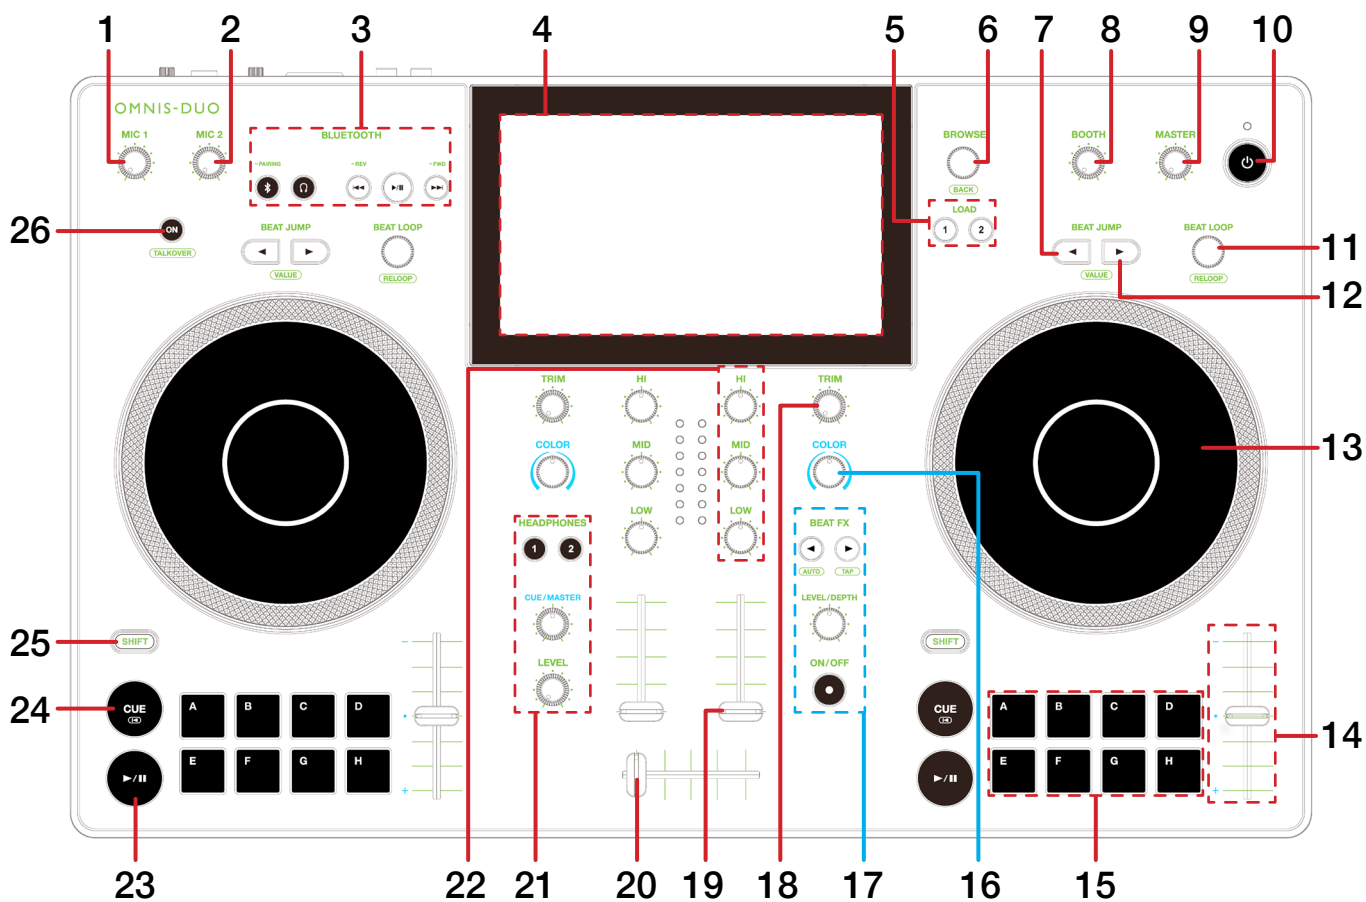

# Overview

#	OMNIS-DUO CONTROL	FUNCTION	SHIFT FUNCTION
1	MIC 1	Turn to adjust microphone 1 level	-
2	MIC 2	Turn to adjust microphone 2 level	-
3	BLUETOOTH (SECTION)	Adjust various Bluetooth controls. See manufacturer documentation for more information	-
4	TOUCH SCREEN DISPLAY	Several Serato DJ Lite features are available via the touch-screen display including: Sync [WAVEFORM] Tempo range [WAVEFORM] Jog mode [WAVEFORM] Quantize [WAVEFORM] Slip [WAVEFORM] Beatgrid Adjust [WAVEFORM] Toggle Keylock / Pitch 'n Time DJ [WAVEFORM] Waveform playhead & zoom [WAVEFORM] Beat FX [WAVEFORM > FX] FX Channel select [WAVEFORM > FX] Sound Color FX [WAVEFORM > FX] Library [BROWSE]	Sync OFF [WAVEFORM]
5	LOAD 1 / 2	Load selected track to deck 1 or 2	-
6	BROWSE	Turn to scroll library. Press in to cycle forward between Library & Crate area. Double press to Instant Double selected track	Press in to cycle backward between Library & Crate area. Turn to perform fast library scroll
7	BEAT JUMP LEFT	Press to perform Beat Jump left	Change Beat Jump value
8	BOOTH	Adjust booth output level	-
9	MASTER	Adjust master output level	-
10	POWER	Press to turn device on	-
11	BEAT LOOP	Press in to toggle 4 Beat Autoloop on / off, turn left to halve loop length, turn right to double loop length	Press in to reloop / exit loop
12	BEAT JUMP RIGHT	Press to perform Beat Jump right	Change Beat Jump value
13	JOG WHEEL	Turn jog to bend pitch, or control waveform within Serato DJ in vinyl mode	Fast track waveform scroll
14	TEMPO SLIDER	Adjust tempo / pitch	-
15	PERFORMANCE PADS	Pads 1-4 trigger Serato DJ Lite Cue points, and if no Cue point is present on that slot/pad, pressing that pad will set a Cue point. Pad 5 loads the previous track, pad 6 performs rewind, pad 7 performs fast forward, and pad 8 toggles reverse playback.	Pressing a populated pad will delete the Cue point from the respective pad/slot.
16	COLOR FX	Turn the respective channel's Color FX Filter knob left or right to apply the effect	-
17	BEAT FX (SECTION)	Beat FX Left & Right increase or decrease multiplier, turning Beat FX Depth right adjusts effect, and Beat FX On / Off toggles Beat FX on and off	Press Beat FX Left to set auto BPM value for Beat FX, and press Beat FX Right repeatedly to manually set Beat FX tempo
18	TRIM	Adjust channel trim level	-
19	CHANNEL FADER	Adjust channel volume (per channel)	Channel fader start (per channel)
20	CROSSFADER	Crossfade audio between channel 1-2	-
21	HEADPHONES (SECTION)	Toggle channel cue for channel 1 / 2, adjust headphone cue / master mix and adjust headphone level	-
22	EQ (SECTION)	Adjust channel EQ (Hi, Mid, Low)	-
23	PLAY / PAUSE	Toggles Play / Pause on selected deck	Stutter play
24	CUE	Cues from temp cue point/Set temp cue point	Load previous track
25	SHIFT	Shift modifier, which can be held while using another control for secondary SHIFT function	-
26	(MIC) ON	Turn microphone on/off	Talkover

# Help

## Show Tooltips

Click on the **Help** button in the upper right-hand corner of Serato DJ Lite, then **Show tooltips** to enable tooltips. Tool tips provide a handy way to learn the various features of Serato DJ Lite.

Move the mouse over a section of the screen to bring up a context sensitive tool tip.

## Watch Tutorials

Click on the **Help** button in the upper right-hand corner of Serato DJ Lite, then **Watch tutorials** to launch your default internet browser and watch tutorials, to help you get familiar with Serato DJ Lite.

## Get Support

Click on the **Help** button in the upper right-hand corner of Serato DJ Lite, then **Get support** to launch your default internet browser and navigate to the Serato DJ Lite knowledge base, where you can find helpful articles and guides on Serato DJ Lite. Alternatively, type in the **Search help** **Go** box, with keywords, to search the Serato DJ Lite knowledge base for specific, related topics.